

Lecture 12: Wavelength Conversion and Optical Regeneration

Kerr Effects



$$\frac{\partial A}{\partial z} = -\alpha A + j \frac{1}{2} \beta_2 \frac{\partial^2 A}{\partial t^2} - \frac{1}{6} \beta_3 \frac{\partial^3 A}{\partial t^3} - j\gamma |A|^2 A$$

- ⇒ Optical power in the fiber (Silica) can alter the index of refraction
- ⇒ All the resulting effects are generically called as “Kerr effects”
- ⇒ In general, Kerr effect induces a phase modulation on the signal that is proportional to its instantaneous power level
- ⇒ The phase modulation is then converted to amplitude modulation by fiber dispersion
- ⇒ Though its apparent simplicity in the above equation, Kerr effects are very difficult to be studied analytically




Kerr
Effect term


Fiber XPM using Raman Gain

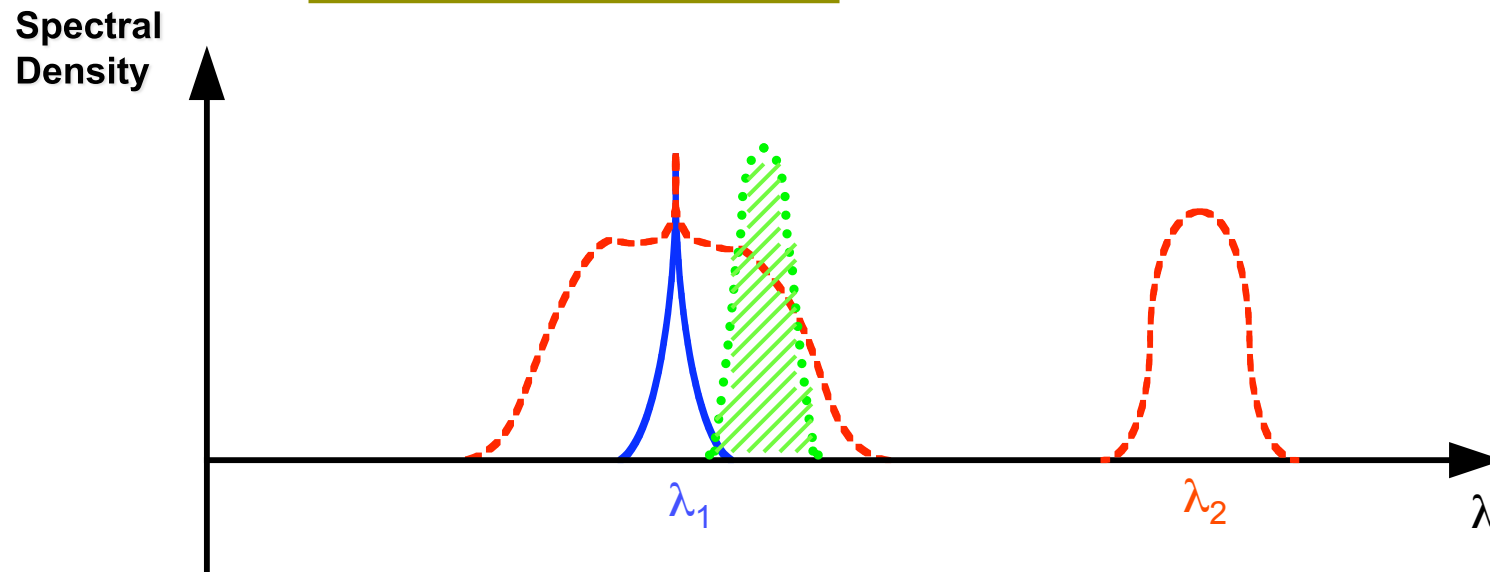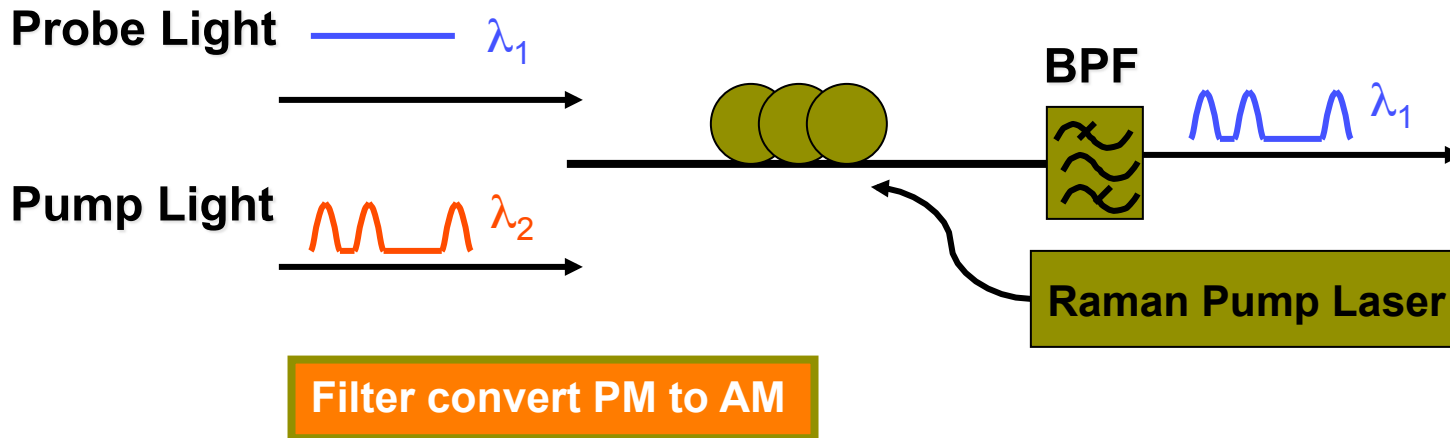

Fiber XPM with Raman Gain

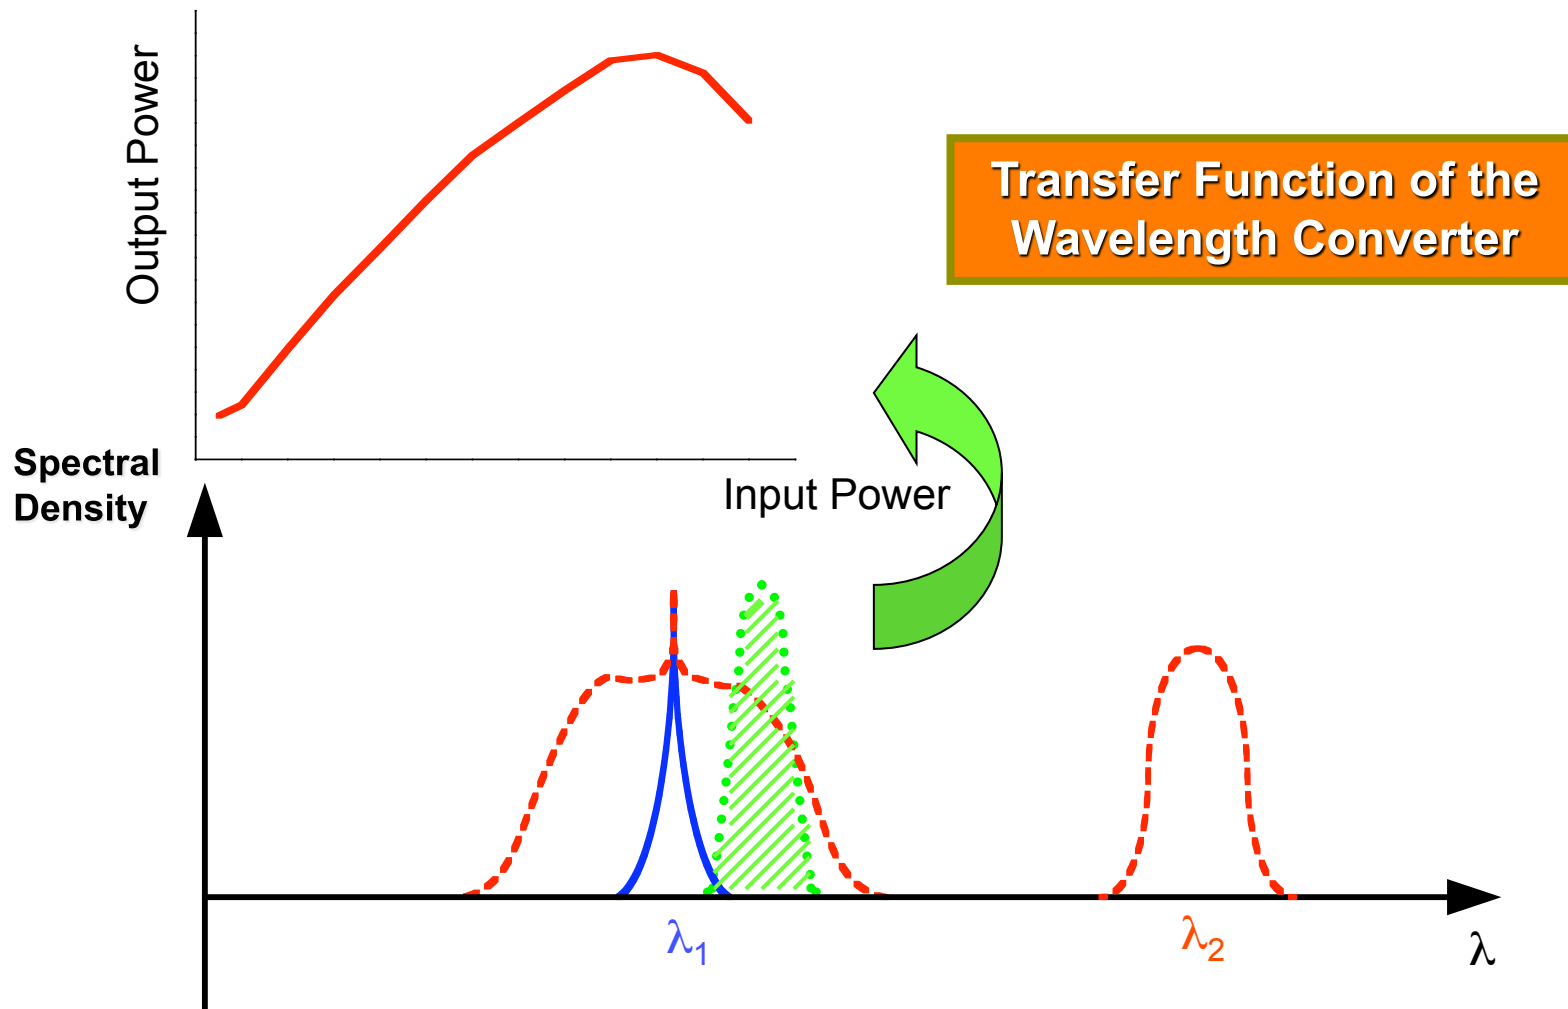


Fiber Four Wave Mixing (FWM)

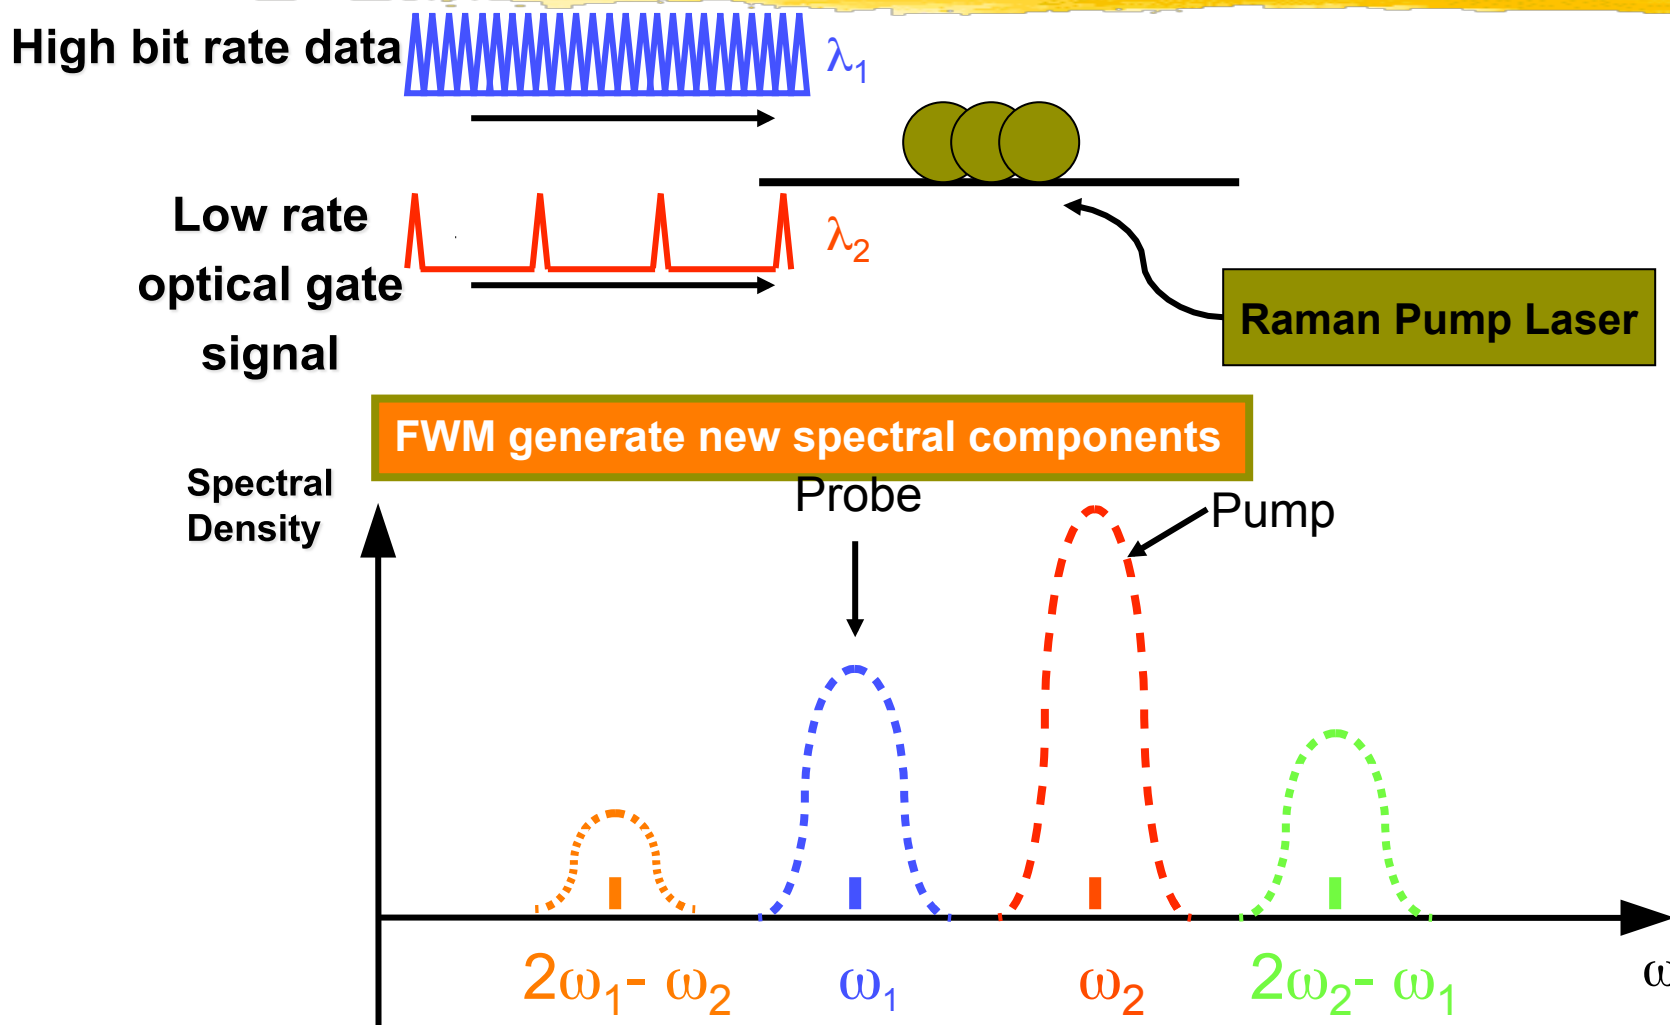

Optical Regeneration

- ⇒ The success of digital electronics is based in the regenerative capabilities of transistor based gate logic.
- ⇒ Current WDM optical networks are analog during the optical transport, routing and switching
- ⇒ Devices are now demonstrated that show regeneration in the optical domain that can
 - ⇒ Clean up ASE noise
 - ⇒ Restore the extinction ratio of a digital intensity modulated signal


1R Regeneration: Analog amplification
Can provide gain but also adds noise. Noise accumulates during cascading

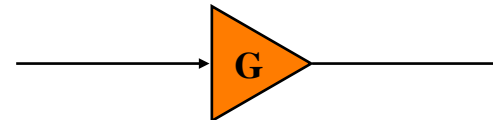

2R Regeneration: Nonlinear thresholding
Cleans up noise in the ones and zeros levels
Cascading these elements can lead to jitter accumulation



3R Regeneration: Thresholding with retiming
A completely regenerative technique. Will lead to cascable optical digital systems



1R - Reamplification




- ⇒ We have already discussed optical amplification using a variety of approaches: SOAs, EDFAs, Raman Amplifiers, etc.
- ⇒ Important metrics include noise figure (NF), pulse distortion (leads to inter-symbol interference, pattern dependence), nonlinearities or crosstalk (which we have not discussed so far) and chirp.

2R - Reamplification and Reshaping




- ⇒ Reshaping requires some form of non-linearity operation on the signal to “redistribute” the noise and signal
- ⇒ It has to be done in a manner that improves the SNR
- ⇒ We will see that 2R alone can increase the “jitter” in the signal (Jitter will be defined later)
- ⇒ In the end we want to decrease the number of bit-errors at the receiver. If the process of re-shaping creates errors, these are unrecoverable at the receiver (unless some type of error correction is performed. We will learn about error correction in ECE228C.

2R Regeneration

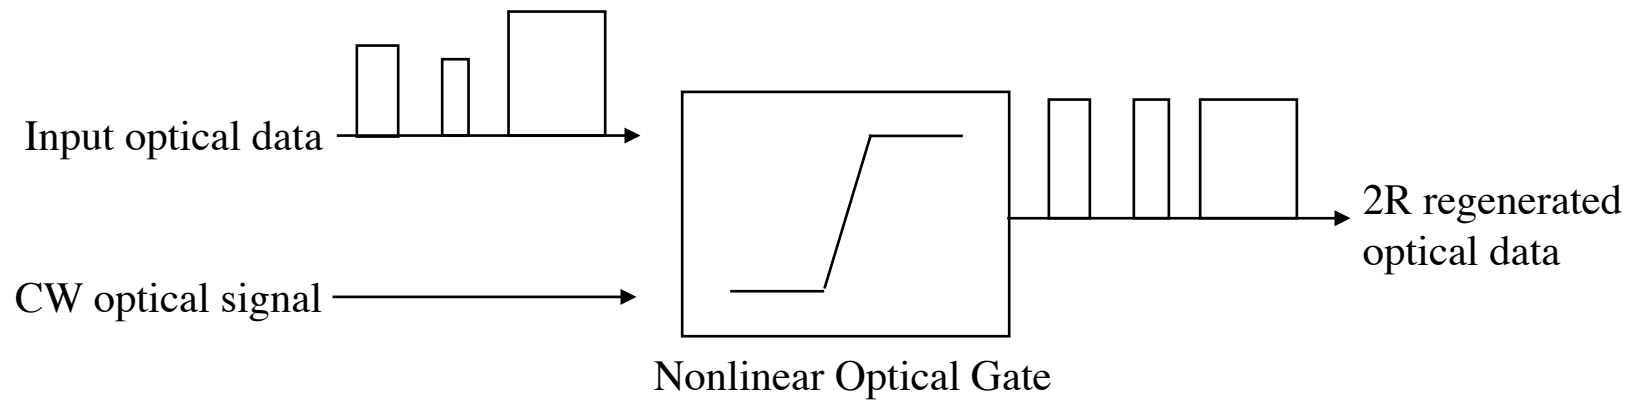

Bit Error Rate (BER)

- ⇒ Probability of error = $P[0]P[1|0] + P[1]P[0|1]$
 - ⇒ $P[0]$ = Probability a “0” was transmitted
 - ⇒ $P[1]$ = Probability a “1” was transmitted
 - ⇒ $P[1|0]$ = Probability a “1” is received given that a “0” is transmitted
 - ⇒ $P[0|1]$ = Probability a “0” is received given that a “1” is transmitted

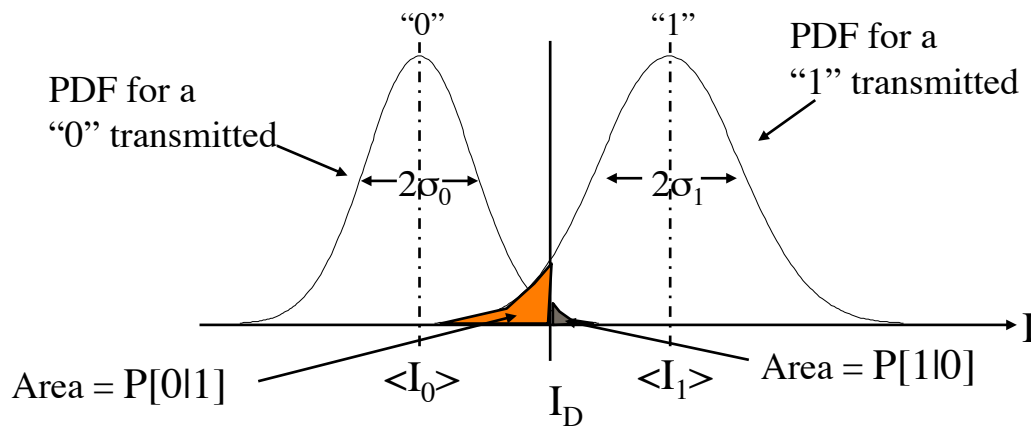


Under the Gaussian noise assumption:

$$P[1|0] = \frac{1}{\sigma_0 \sqrt{2\pi}} \int_{I_D}^{\infty} \exp\left\{-\frac{(\langle I_0 \rangle - I)^2}{2\sigma_0^2}\right\} dI$$


$$P[0|1] = \frac{1}{\sigma_1 \sqrt{2\pi}} \int_{-\infty}^{I_D} \exp\left\{-\frac{(\langle I_1 \rangle - I)^2}{2\sigma_1^2}\right\} dI$$

2R Noise Redistribution

- ⇒ Nonlinear transfer function re-distributes the noise at the input.
- ⇒ Extinction ratio is expanded
- ⇒ Important to note that apparent squeezing of noise distributions and expansion of ER does not translate to improved BER
 - ⇒ If signals are moved from a 0 to a 1 or visa versa, an error will be generated

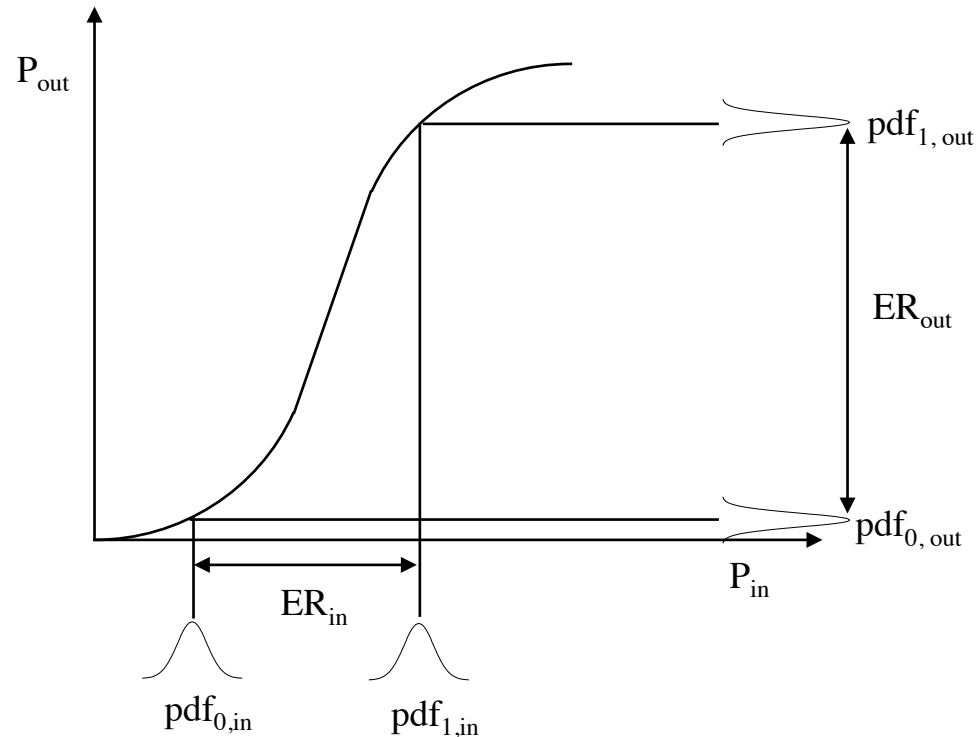


Timing Jitter

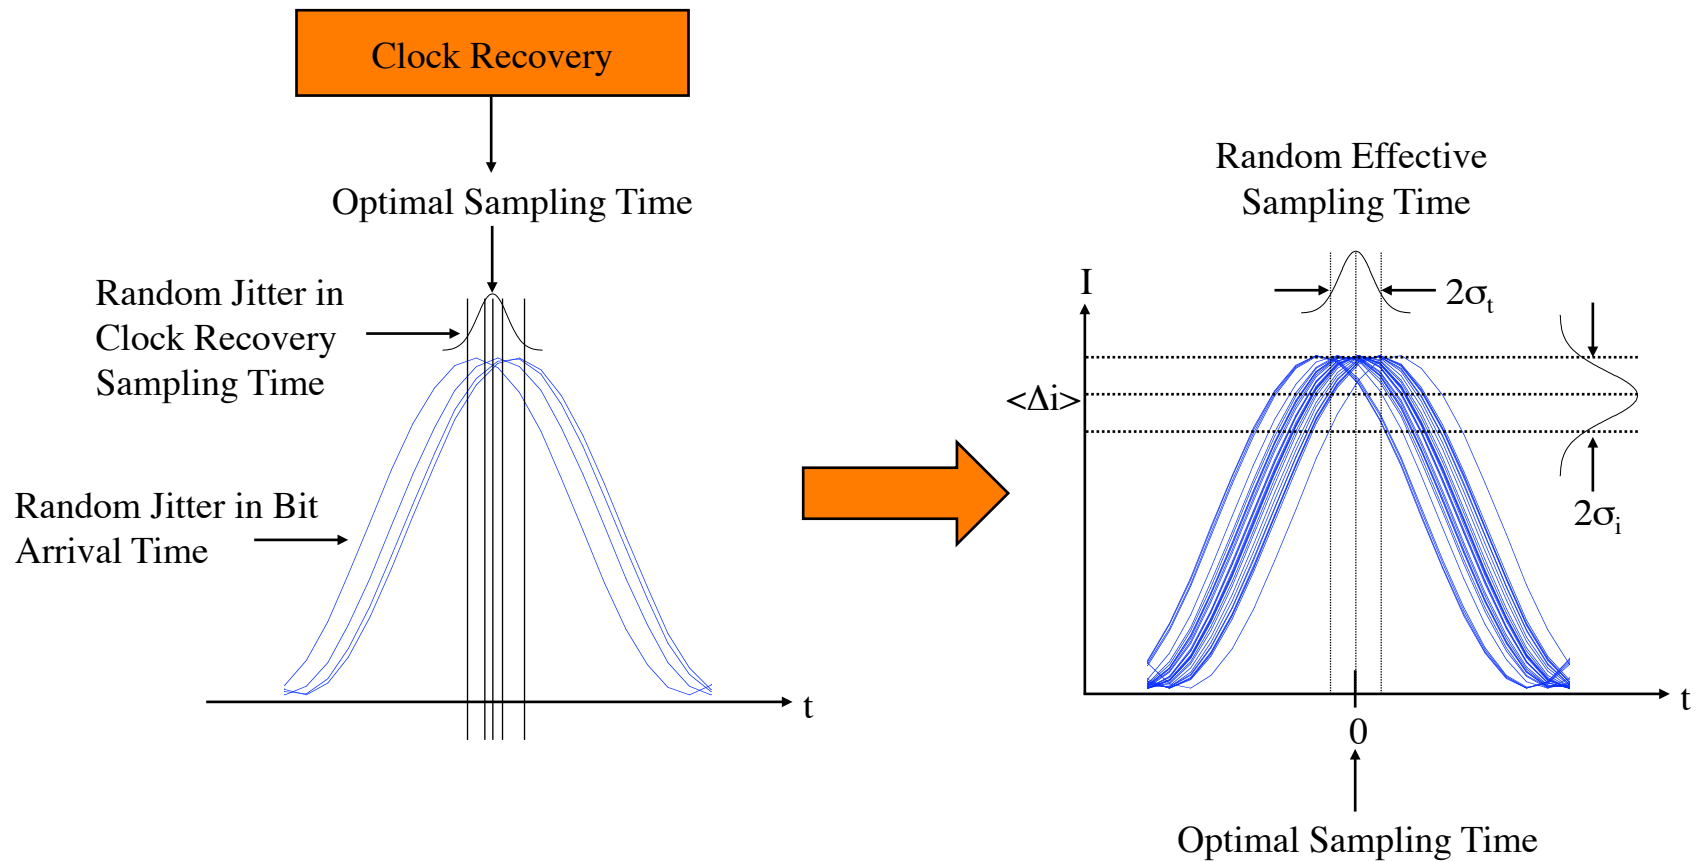


Nonlinear Transfer Function

⇒ The equation used to model the transfer function is where The degree of non-linearity is controlled by γ

$$T(x) = \begin{cases} x \tan \alpha + e & x < x_a \\ x \tan \gamma - c & x_a \leq x \leq x_b \\ 1 - (1 - x) \tan \beta & x_b < x \end{cases}$$


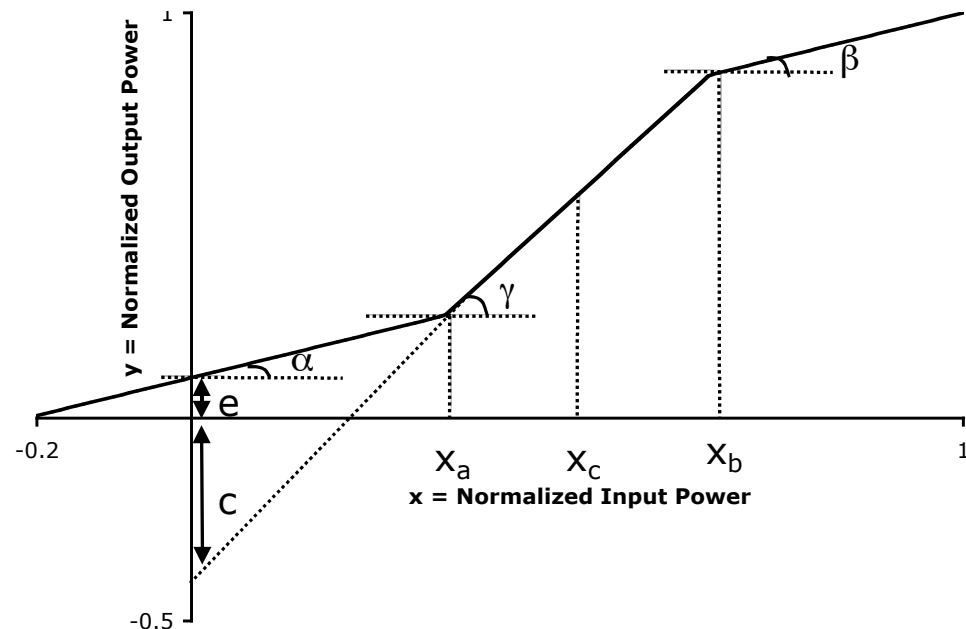


Nonlinear Optical Interferometric Implementations

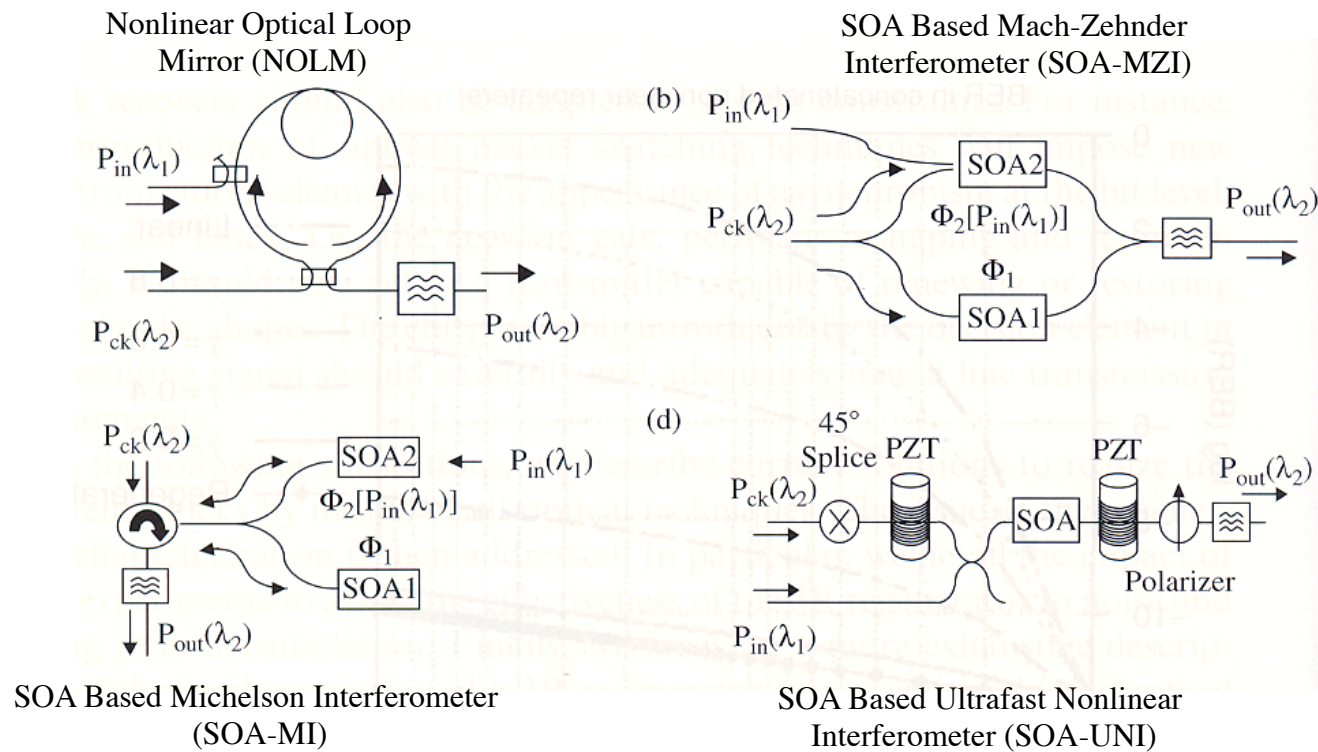


SOA Interferometer Example

Cross-Phase Modulation Principle

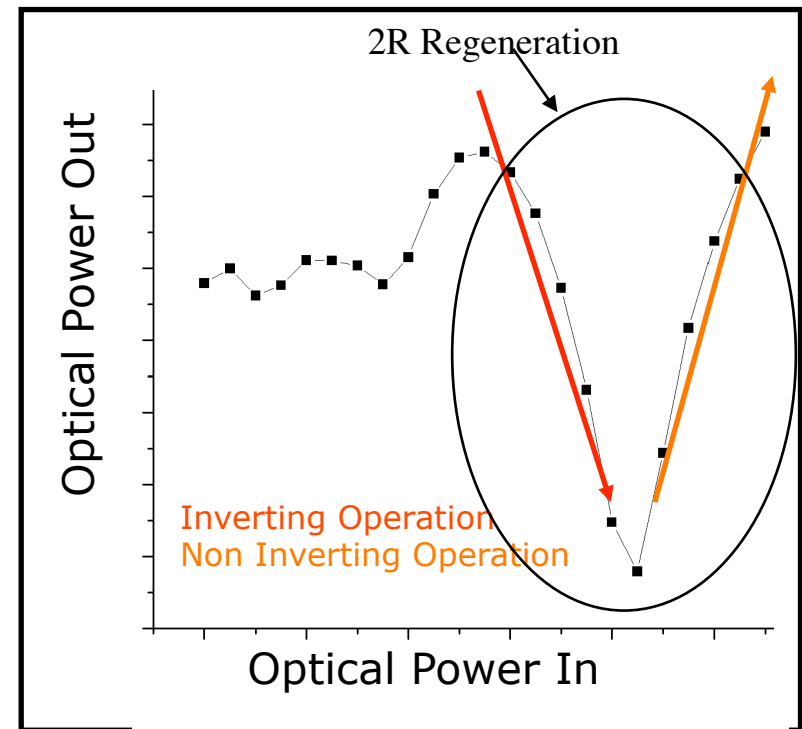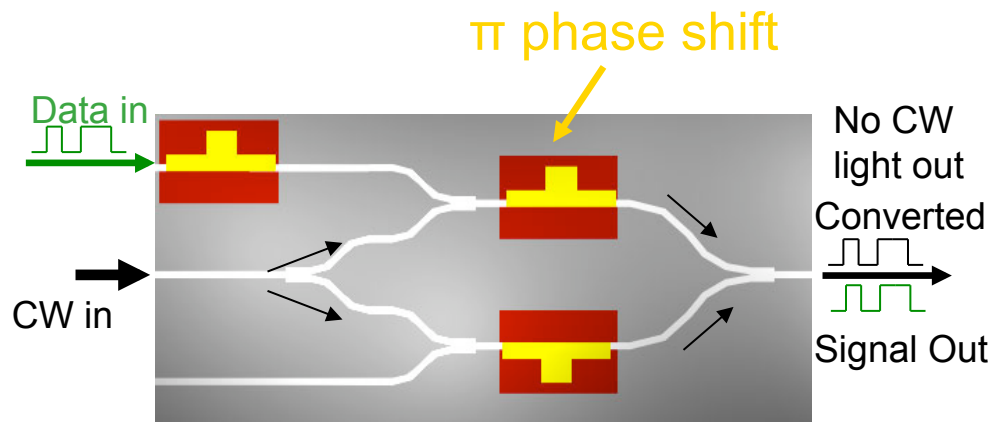


Nonlinear-Filter Based 2R Regenerators


- ⇒ An optical nonlinearity that converts intensity change to phase change will induce a frequency shift.
- ⇒ Using an optical bandpass filter converts the resulting frequency shift back to an intensity modulated signal
- ⇒ The combined transfer function is step like (thresholding) and can 2R regenerate.

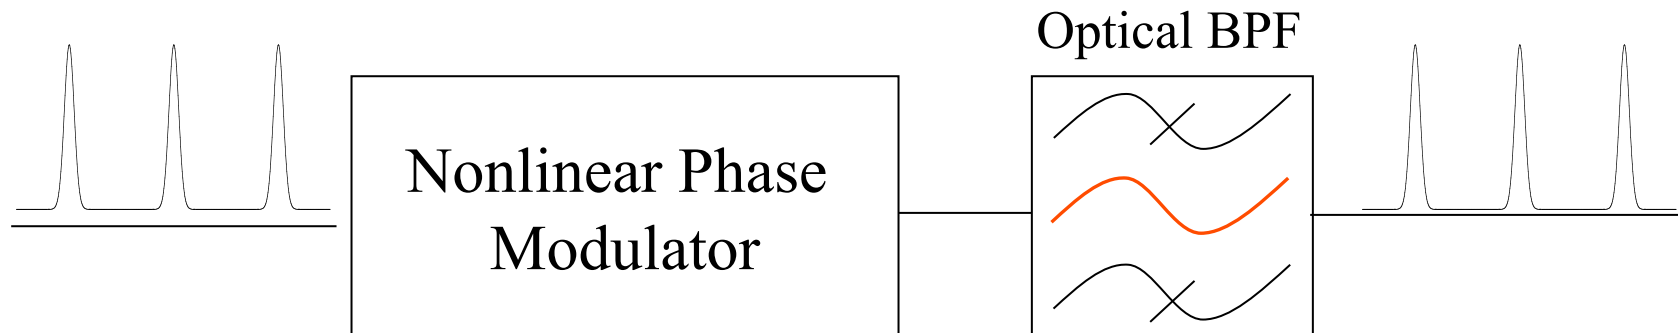

Raman Enhanced XPM Wavelength Converter

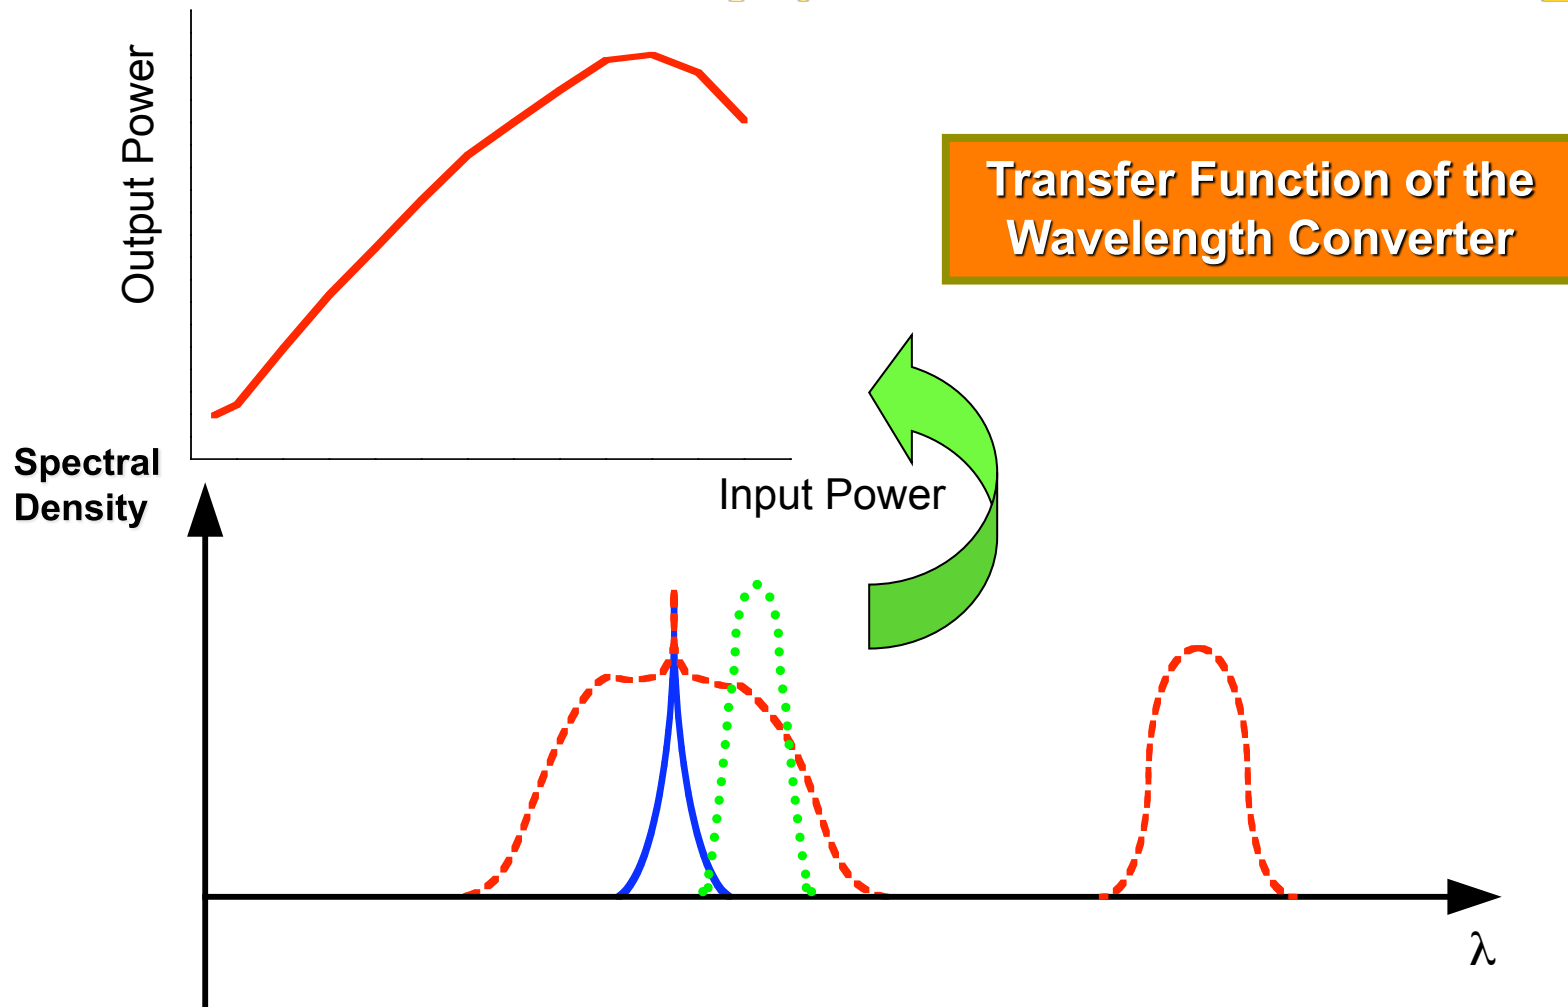


Regeneration property of the WC

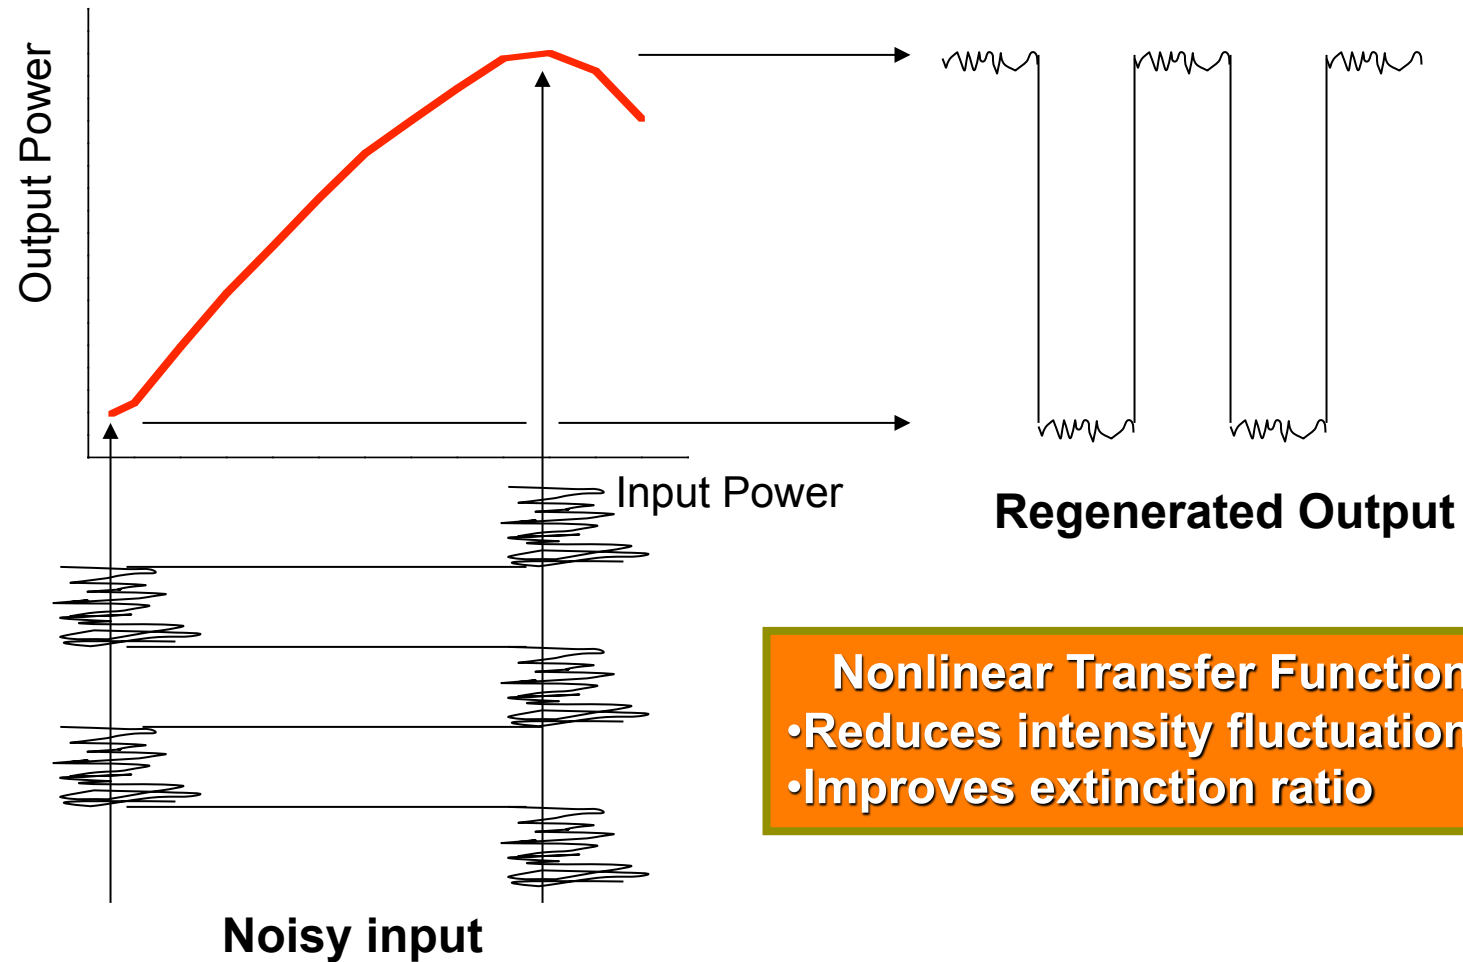


Nonlinear Transfer Function

- Reduces intensity fluctuations
- Improves extinction ratio


Performance at 40Gbps (Wei Wang, UCSB)

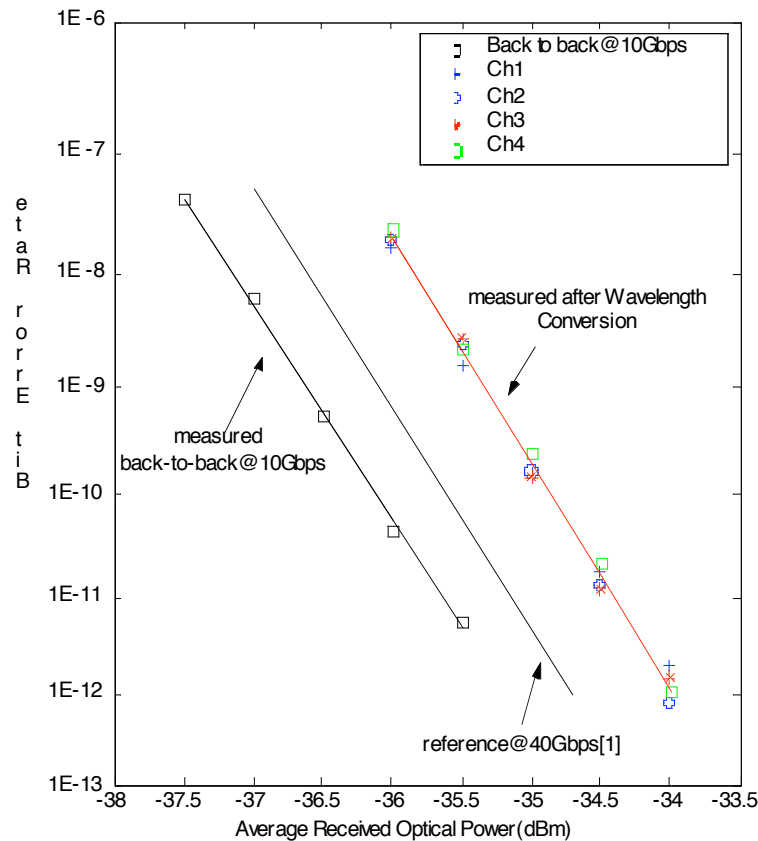

Input 40G eye diagram@1559nm



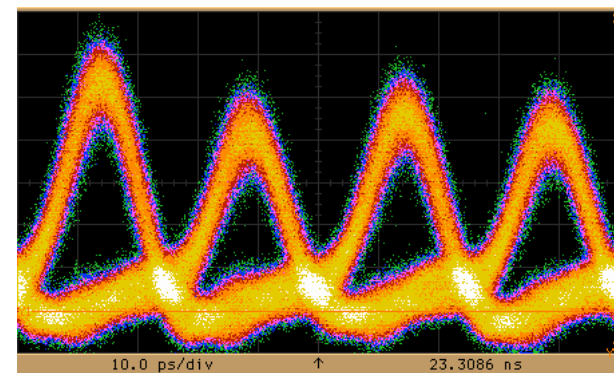


Converted 40G eye diagram@1554nm

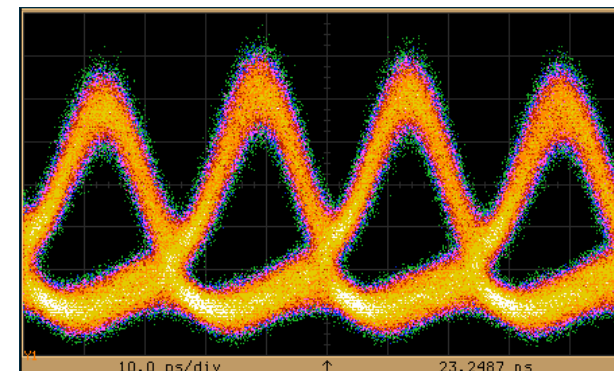


⇒ Conversion efficiency increase 18dB, ($P_{\text{Raman}} = 600\text{mW}$)

Performance at 80Gbps

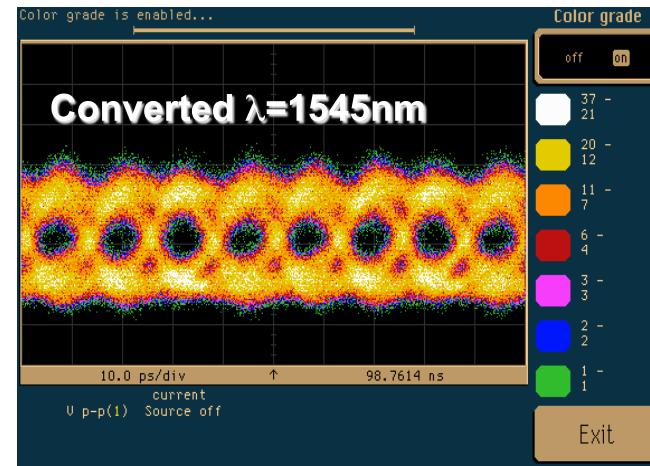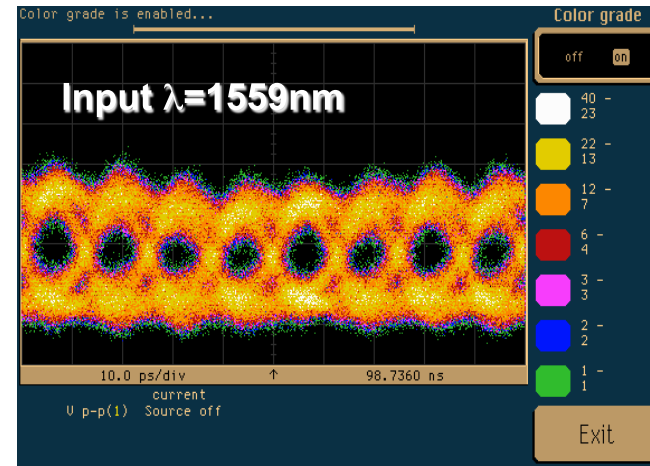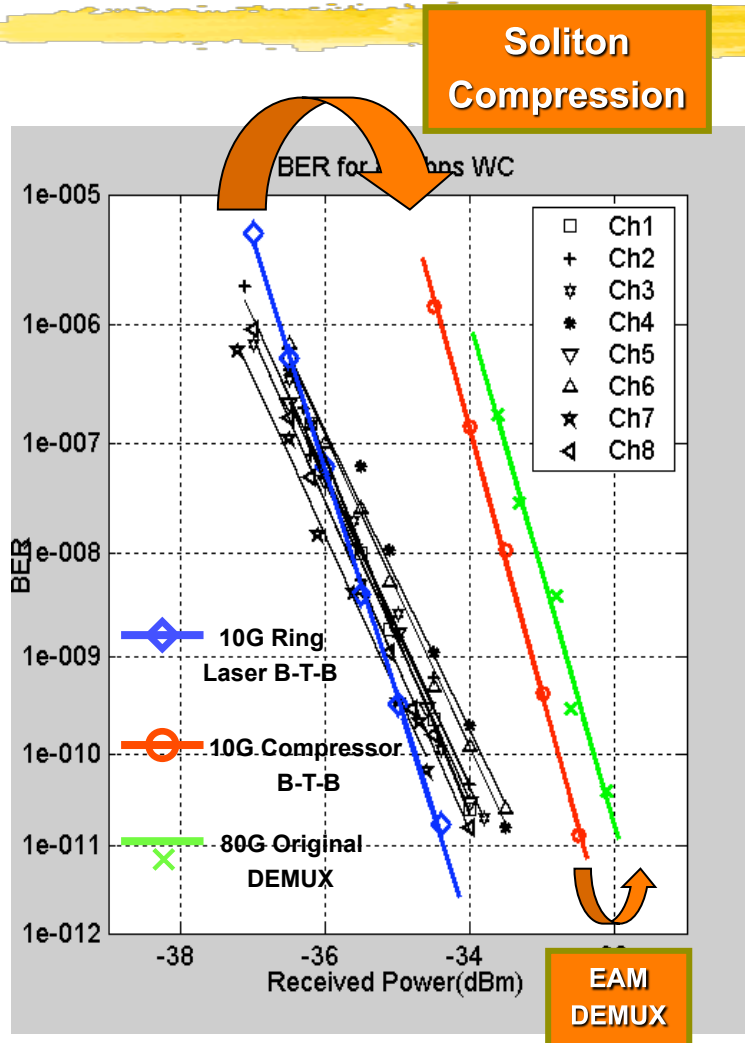

Self-phase modulation in SOA

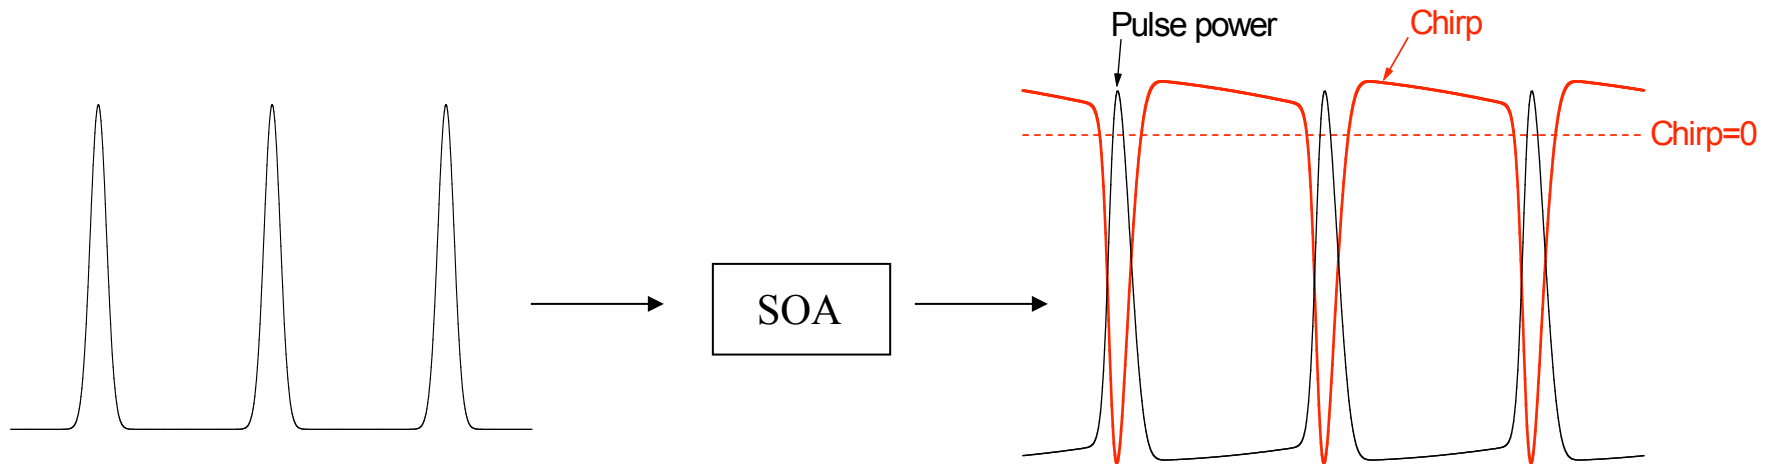


High power: Gain saturation (fast) → Index modulation: Frequency chirp (red shift)

Low power: Gain recovery (slow) → Index modulation: Frequency chirp (blue shift)

- High and low power contents separated in frequency.



Filtering

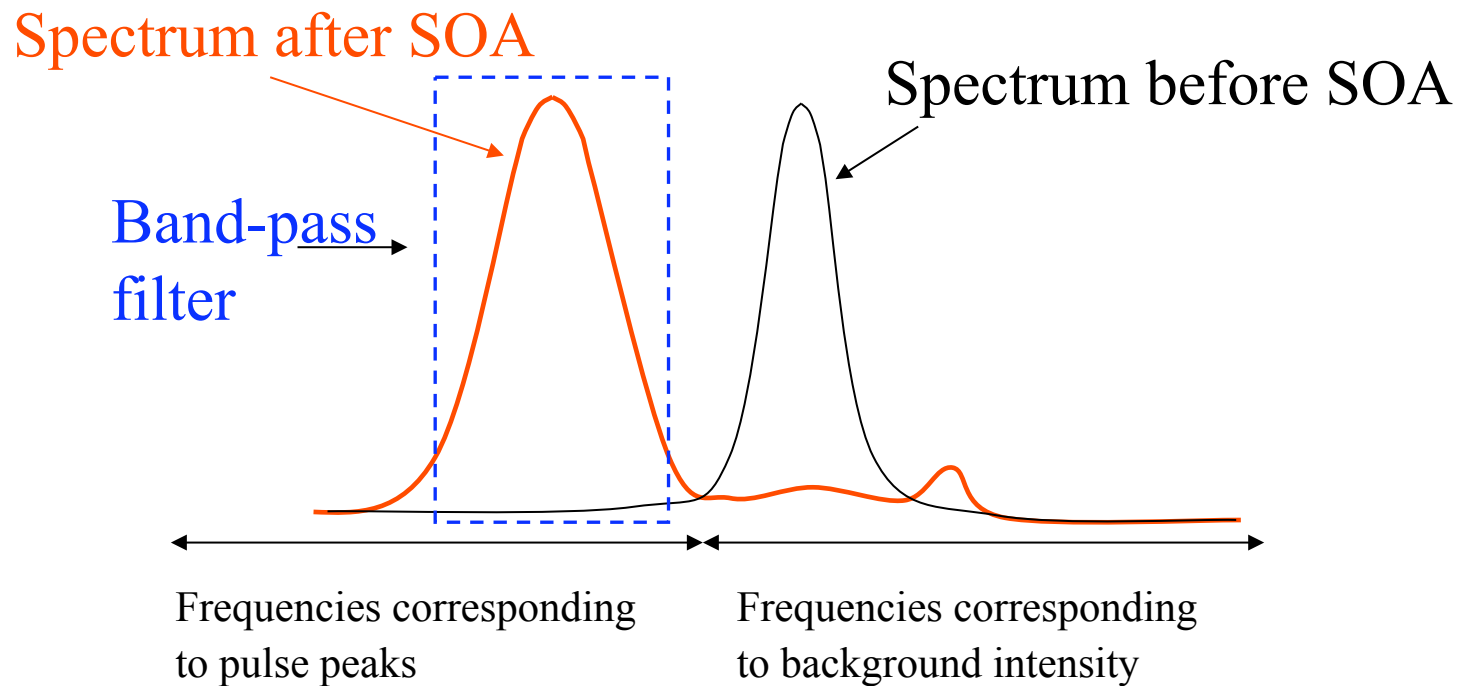



- Background intensity reduced

40Gb/s eye diagrams

40GHz pulse train and 40Gb/s eye diagram
after degradation and multiplexing

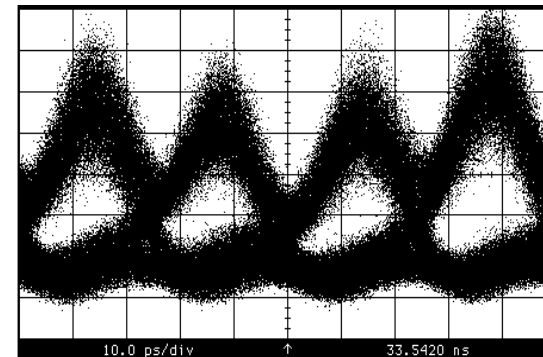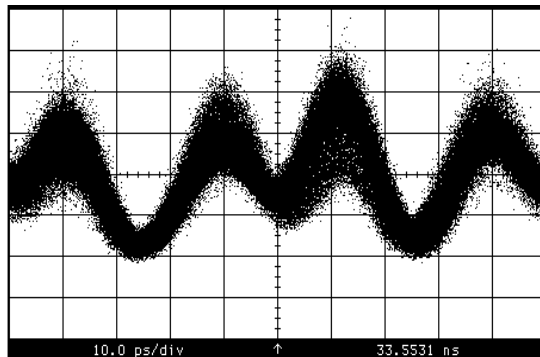


40GHz pulse train and 40Gb/s eye diagram
after degradation, ER-improvement, and multiplexing

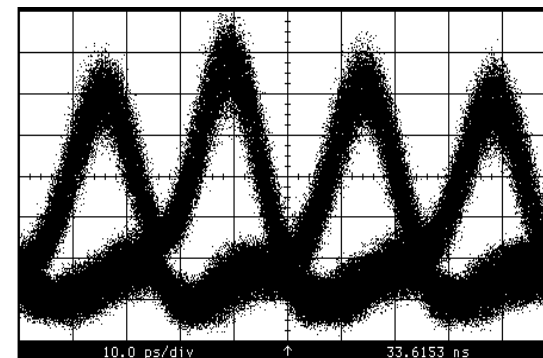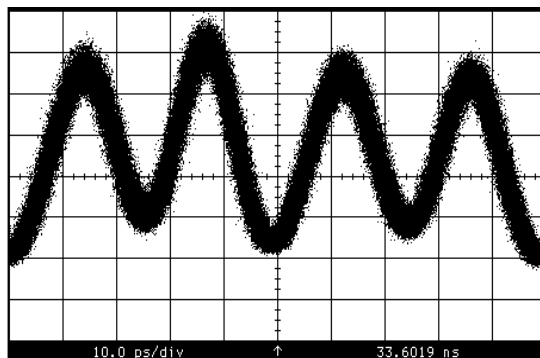


3R- Retiming, Reshaping and Reamplification

Degraded
Optical signal

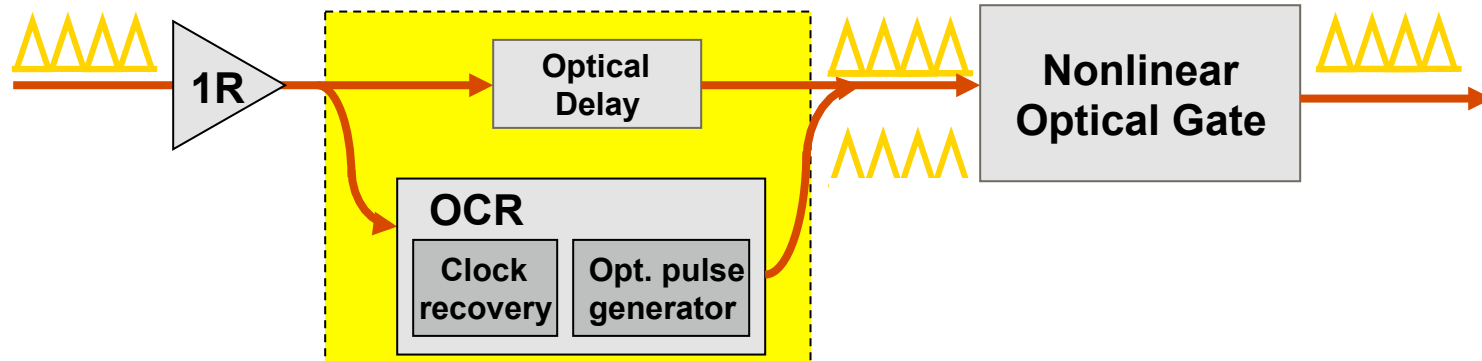


Optical Clock Recovery for Receivers and Optical 3R

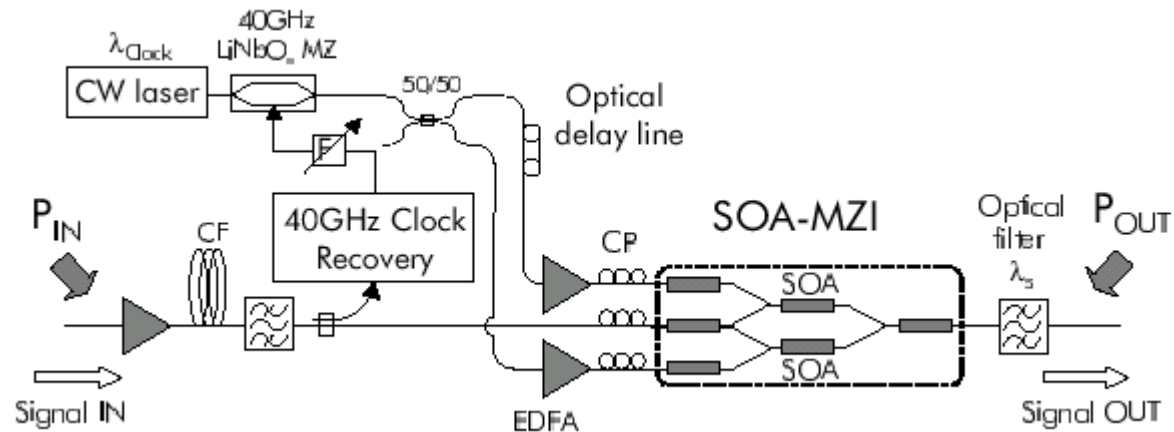


Alcatel

- Non-integrated Electronic clock recovery + Optical WC demonstrated
- All-optical clock recovery techniques like self-pulsation have been demonstrated (HHI, CREOLE). Planar integration with complex circuits an issue.

TWEAM Based OCR and 3R (H. Chou and Z. Hu)

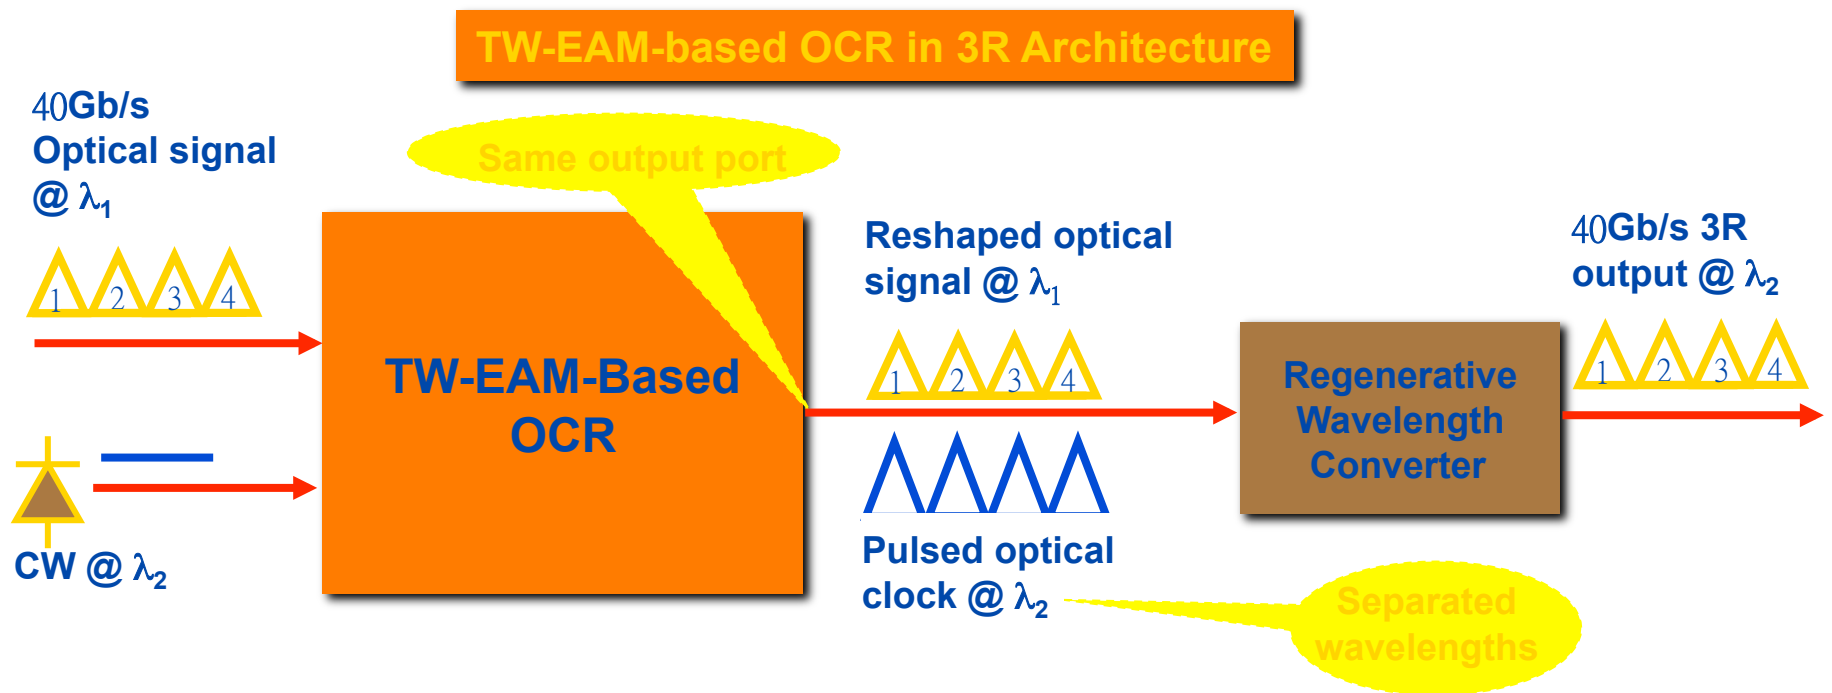


TWEAM Based OCR

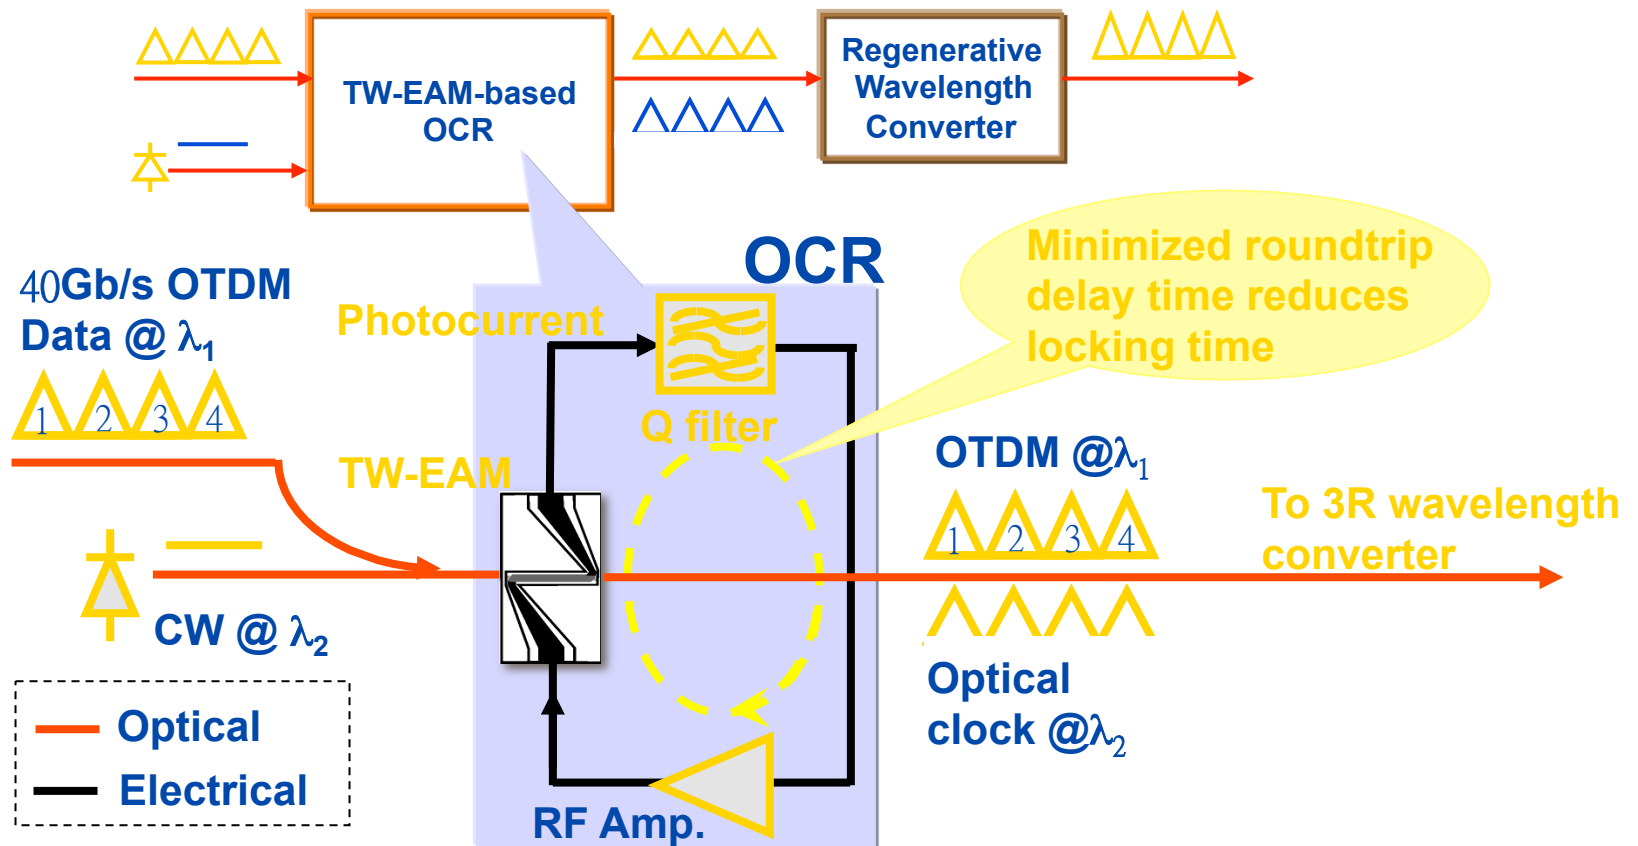


OCR Operation

~40Gb/s input OTDM @ 1554nm

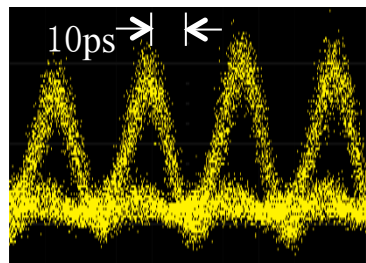

~40Gb/s output OTDM @ 1554nm

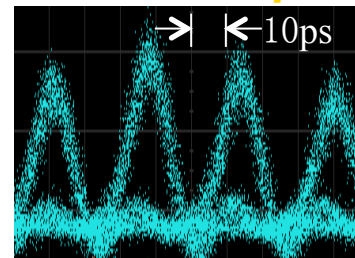

CW @ 1558nm

Polarization controller



EDFA



OBPF

